



Gross weight:
0.4kg/m



Dimmable:
DALI, 0-10V, DMX, Triac



Installation Temp.:
0°C to +55°C




Ambient Temp.:
-25°C to +55°C



Min. Bending :
80mm



Beam Angle :
120 degree

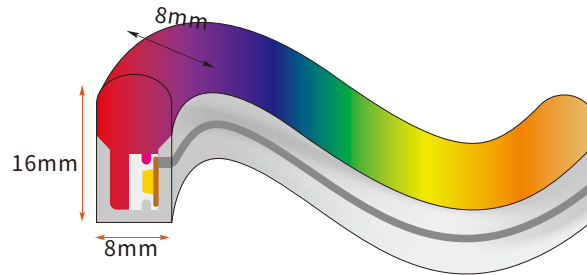

Environmentally friendly
silicone material

Features

Uniform and even light output

Flat surface with 120 degree beam angle

100 LEDs 12vDC

Dimmable with Dali, DMX, PWM

Full encapsulated with IP68 Connections

High Reliability

3 or 5 Years warranty

Applications

Building facade, outline

Cove lighting

Architectural Integration

Wayfinding


Swimming Pools & Landscaping

Decorative lighting

Billboard & Advertising



outdoor use



indoor use



Class 2



One Bin Only



IP68



LM-80



UV
Protected



Corrosion
Resistant



CE



RoHS



IK08



Saltwater
Resistant

ITEM CODE	TA-M-3535-12v-silicone-RGB	MAX LENGTH	5M (SINGLE FEED) 10M (DOUBLE FEED)
VOLTAGE	12 V	LIFE SPAN	50 - 70,000 HRS
POWER CONSUMPTION	12W/PM	HOUSING MATERIAL	Environmentally friendly silicone gel
LED QUANTITY	100 LED/PM	OPERATING TEMP	-25°C to +55°C
COLOUR	RGB Pixel	IP RATING	IP68 SUBMERSIBLE UP TO 2M
CUT UNIT	20MM	WARRANTY	3 YEARS STANDARD, 5 YEAR OPTION
BEAM ANGLE	120 DEGREE		